


# Kensol 65H

## 10 TON AIR-OPERATED ROLL LEAF STAMPING PRESS

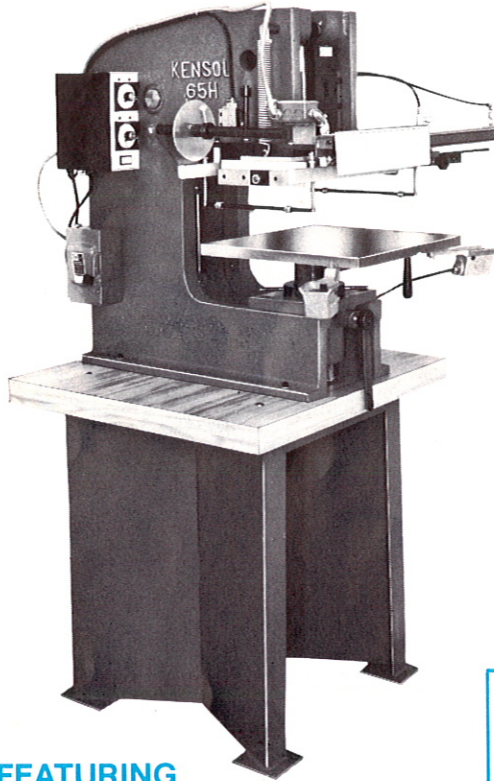


The 65H and the 165H (over) are the most powerful standard toggle presses made by Kensol. The 65H is recommended for heavy stamping on items such as bookcovers, displays, signs, etc. Like all Kensol vertical presses, this press will automatically compensate for thickness variations.

### FEATURING

- Cast iron, dimensionally stable, C frame construction
- Double toggle head drive automatically compensates for thickness variations
- 5½ inch wide head ram and 4 inch diameter table elevating ram for maximum rigidity
- 3 inch head stroke for ease of feeding
- 4 position adjustable outboard table leveling supports (not shown) for 12" x 18" and 12" x 24" heads available
- Stamps items up to 6 inches high
- Electrical control panel with plug-in solid state heat controller and electronic dwell timer
- Setup switch on control panel
- Hand lever included to bring head down manually for setup, if desired
- OSHA approved two hand switches
- Air filter, pressure regulator and automatic lubricator included
- Multiple feed roll leaf attachments available
- Both head and roll leaf attachment has adjustable speed valves
- Delay valve on roll leaf feed aids stripping action

### SPECIFICATIONS

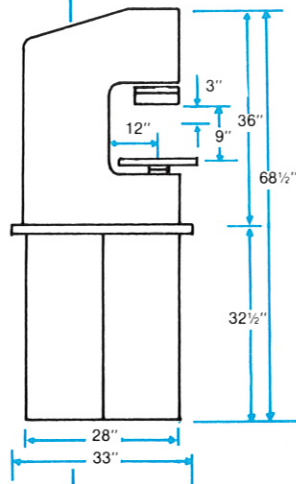

IMPRESSION AREA	HEATING SYSTEM
6 x 8 Inches .....	1,000 Watts
6 x 12 Inches .....	1,500 Watts
10 x 15 Inches .....	4,200 Watts
12 x 18 Inches .....	4,800 Watts
12 x 24 Inches .....	5,700 Watts

Special larger heater heads and roll leaf attachments made to your specifications

HEAD STROKE: 3 Inches

DEPTH OF THROAT: 12 Inches

MAXIMUM OPENING: 9 Inches

WILL HOT STAMP ITEMS UP TO 6 INCHES HIGH

PRESSURE RANGE: Up to 10 Tons

#### WORK TABLE:

- ½" x 12" x 14" standard with 6" x 8" and 6" x 12" heads
- 1" x 16" x 24" standard with 10" x 15" and 12" x 18" heads
- 1" x 16" x 30" standard with 12" x 24" head

Slide out manually for ease of makeready

HEAT CONTROL: Plug-in style solid state 0-600°F range proportioning over 4200 watts

DWELL TIMER: Plug-in style solid state electronic 0-5 second range, 0-10 second optional

CONTROLS: Two hand, concurrent, no tie down switches with head shut safety system

ELECTRICAL REQUIREMENTS: 110 Volts A.C. standard on 6" x 8" and 6" x 12" heads; 220 Volts A.C. standard on larger heads

COMPRESSED AIR REQUIREMENTS: 10 CFM at 100 P.S.I.

DIMENSIONS: 25" deep x 32" wide x 68½" high

WEIGHT: 1,200 pounds net

See Bulletin 1-7 for type and die holders, turntable, power sliding table, and other accessories

## KENSOL-OLSENMARK INC.

40 MELVILLE PARK ROAD, MELVILLE, N.Y. 11747

PHONE: (516) 694-7773 • TWX 510-224-6418

WE ALSO MANUFACTURE FOILMARK ROLL LEAF